



机框/风叶: PBT塑料


耐压: 交流500V持续1分钟,漏电源小于5毫安

绝缘度: 在引线与机框之间直流500V电压时10兆欧

工作温度: -20°C~80°C

工作湿度: 20%~85%

使用寿命(25°C时): 滚珠轴承风扇5万小时, 含油轴承风扇为3万小时

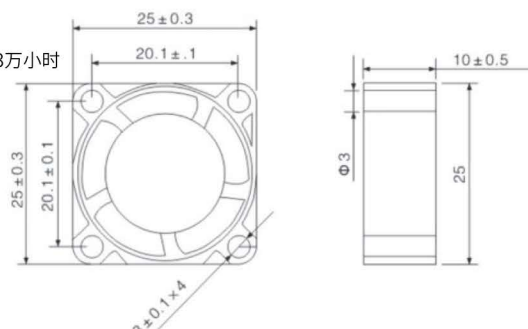

Specification

Model	Bearing	Rated voltage	Rated current	Rated input power	Nominal speed	Air flow		Air pressure		Noise	Weight
		(V)	(A)	(W)	(RPM)	(CFM)	(m³/min)	(mm/H₂O)	(inch-H₂O)	(dBA)	(g)
DF2510L05	sleeve/ball	5	0.09	0.45	7000	1.21	0.034	2.18	0.085	19.6	6.8
DF2510L12	sleeve/ball	12	0.13	0.36	7000	1.21	0.034	2.18	0.085	19.6	
DF2510M05	sleeve/ball	5	0.03	0.65	10000	1.99	0.056	4.48	0.176	22.8	
DF2510M12	sleeve/ball	12	0.05	0.6	10000	1.99	0.056	4.48	0.176	22.8	
DF2510H05	sleeve/ball	5	0.17	0.85	12000	2.38	0.067	7.37	0.290	25.2	
DF2510H12	sleeve/ball	12	0.08	0.96	12000	2.38	0.067	7.37	0.290	25.2	
DF2510H05-HH	sleeve/ball	5	0.28	1.15	15000	2.98	0.084	7.98	0.314	28.9	
DF2510H12-HH	sleeve/ball	12	0.1	1.2	15000	2.98	0.084	7.98	0.314	28.9	