



机框/风叶: PBT塑料


耐压: 交流500V持续1分钟,漏电源小于5毫安

绝缘度: 在引线与机框之间直流500V电压时10兆欧

工作温度: -20°C~80°C

工作湿度: 20%~85%

使用寿命(25°C时): 滚珠轴承风扇5万小时, 含油轴承风扇为3万小时

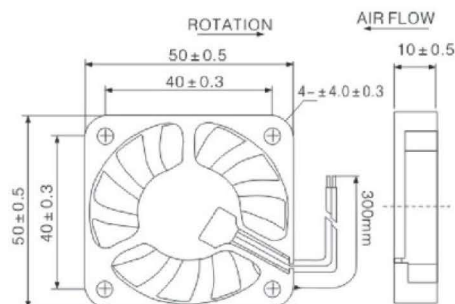

Specification

Model	Bearing	Rated voltage	Rated current	Rated input power	Nominal speed	Air flow		Air pressure		Noise	Weight
		(V)	(A)	(W)	(RPM)	(CFM)	(m³/min)	(mm/H₂O)	(inch-H₂O)	(dBA)	(g)
DF5010B(S)5H	sleeve/ball	5	0.3	1.5	5300	10.20	0.29	3.65	0.14	33.0	18
DF5010B(S)5M	sleeve/ball	5	0.20	1.00	4500	9.15	0.26	2.75	0.11	27.0	
DF5010B(S)5L	sleeve/ball	5	0.14	0.70	3400	7.20	0.20	2.02	0.08	21.0	
DF5010B(S)12H	sleeve/ball	12	0.16	1.92	5300	10.20	0.29	3.65	0.14	33.0	
DF5010B(S)12M	sleeve/ball	12	0.08	0.96	4500	9.15	0.26	2.75	0.11	27.0	
DF5010B(S)12L	sleeve/ball	12	0.07	0.84	3500	7.20	0.20	2.02	0.08	21.0	
DF5010B(S)24H	sleeve/ball	24	0.09	2.16	6000	10.20	0.29	3.65	0.14	33.0	
DF5010B(S)24M	sleeve/ball	24	0.07	1.68	5000	9.15	0.26	2.75	0.11	27.0	
DF5010B(S)24L	sleeve/ball	24	0.05	1.20	4000	7.20	0.20	2.02	0.08	21.0	