




机框/风叶: PBT塑料
 耐压: 交流500V持续1分钟,漏电源小于5毫安
 绝缘度: 在引线与机框之间直流500V电压时10兆欧
 工作温度: -20°C~80°C
 工作湿度: 20%~85%
 使用寿命(25°C时): 滚珠轴承风扇5万小时, 含油轴承风扇为3万小时

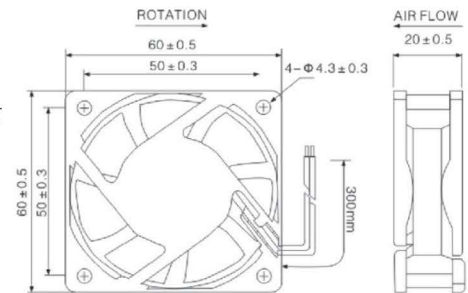

Specification

Model	Bearing	Rated voltage	Rated current	Rated input power	Nominal speed	Air flow		Air pressure		Noise	Weight
		(V)	(A)	(W)	(RPM)	(CFM)	(m³/min)	(mm/H₂O)	(inch-H₂O)	(dBA)	(g)
DF6020B(S)12H	sleeve/ball	12	0.16	1.92	4200	16.71	0.47	3.18	0.13	33.0	45
DF6020B(S)12M	sleeve/ball	12	0.12	1.44	3500	15.02	0.42	2.80	0.11	31.0	
DF6020B(S)12L	sleeve/ball	12	0.08	0.96	3000	13.15	0.37	2.52	0.10	27.0	
DF6020B(S)24H	sleeve/ball	24	0.13	3.12	4200	16.71	0.47	3.18	0.13	33.0	
DF6020B(S)24M	sleeve/ball	24	0.10	2.4	3500	15.02	0.42	2.80	0.11	31.0	
DF6020B(S)24L	sleeve/ball	24	0.08	1.92	3000	13.15	0.37	2.52	0.10	27.0	